


Yangtze Alligator Mouse User Manual

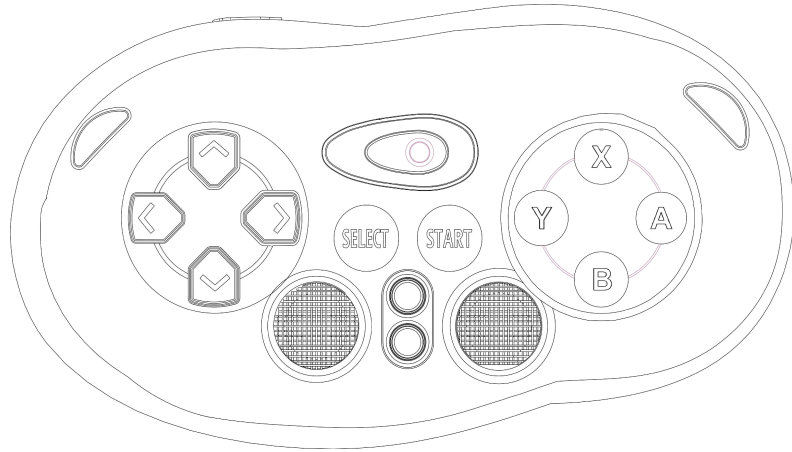

Contact Info:

Tel: +86 755 29685561 29685623 29685653

Email: info@quickerstyle.com

Home: www.quickerstyle.com

Head Office:

2F,A Bldg,WenTao Tech-Park,YingRenShi Village,ShiYan Town,BaoAn District

518108 ShenZhen City,GuangDong Province

China

2.4GHz Driverless Multimedia GameMouse

With Remote Control Function

MSN Online Support: support@quickerstyle.com


www.quickerstyle.com

©GOEASILY INT'L CO., Ltd. 2010

Thank you so much for choosing Yangtze Alligator Mouse! Yangtze Alligator Mouse, a unique innovation that merges wireless mouse, game joypad & PC remote control into a whole, is really a creative reform on conventional PC mouse. Whether in office applications, multimedia game navigations or on vacation trips, Yangtze Alligator Mouse's excellent and approving performance can bring you immeasurable joy & satisfaction!

Package List

- Yangtze Alligator Multimedia Gamemouse;
- Nano Receiver;
- User Manual.

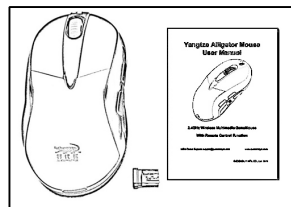

Parameter Table

Basic Parameters:

Brand Name	QuickerStyle
Featured Type	Multimedia Wireless GameMouse with Remote Control Function
Mouse Type	Optical Mouse
Connection Type	Wireless
Transmission Band	2.4GHz
Buttons & Keys	Mouse: 4 keys、 1 scroll wheel
	Joypad: 14 buttons
Interface Type	USB1.1 version / Plug & Forget / Intelligent ID Link
Rated Operational Voltage	1.5V
Rated Operational Current	30mA
System Platform	Windows 95/98/2000/NT/ME/XP/Vista/Win 7
Weight	115g (without battery inside)

Technical Parameters:

Resolution	400/800/1000/1200/1600dpi (adjustable)
Sampling Frequency	125Hz

Ergonomics	Support
Optical Sensor	Pixart Sensor

Other Parameters:

Other Features	Game Joypad Function, Multimedia PC Remote Control, 3D Mouse
----------------	--

Quality Assurance

This product is of one year (from date of purchase) quality warranty except artificial breakdown.

Functionality Outline

- Hi-quality dynamic 2.4GHz frequency hopping communication technology, stable transmission within 10-15 meters;
- 2.4GHz two-way communication technology stably expedites data transmission;
- Nano receiver can be placed inside the mouse, more manageable & unforgettable to carry;
- Built in charging circuit, low battery & charging status LED indicator (Low battery, red LED flickers; LED becomes green while charging and lights off after battery is fully charged);
- After switching to Joypad Mode, you can enjoy all PC games that support joypad operation;
- Two 3D analog sticks on the joypad can achieve different functions in different PC games;
- Creative Gear-Lock can effectively lock mouse left & right buttons to avoid interference while playing games & remotely controlling PC;
- Under Remote Control Mode, Yangtze Alligator Mouse can be applied as PC remote control. (Such as: media player control, opening applications, PC sleep, 3D Mouse, PC power off etc.);
- Mouse firmware fully complies with "HID compliant game controller" standard and "HID compliant optical mouse" standard;
- Firmware auto-sleep & move wake-up capability;
- 1 AA battery power supply, nearly 1.5 month endurance time.



How to Fit Battery

Please pull upwards to open battery cover at the ▲ mark at mouse tail. To fit battery, please insert 1 AA alkaline battery (or rechargeable battery) into the compartment with correct orientation (Battery's positive pole & negative pole must accord with the battery indication printed inside the compartment), then close battery cover.

Mode Switch Instruction

- After Yangtze Alligator Mouse is energized, it will work under Mouse Mode immediately;
- Under Mouse Mode, <1>press down SELECT button for around 4 seconds to switch to Remote Control Mode; <2>press down START button for around 4 seconds to switch to Joypad Mode;
- Under Remote Control Mode, pressing down SELECT button for around 4 seconds can switch back to Mouse Mode; Under Joypad Mode, pressing down START button for around 4 seconds can switch back to Mouse Mode;
- Under Mouse Mode, mouse side button ⑦ is used to adjust mouse resolution among 400/ 800/ 1000/ 1200/ 1600 dpi.

Button Functions under Remote Control Mode

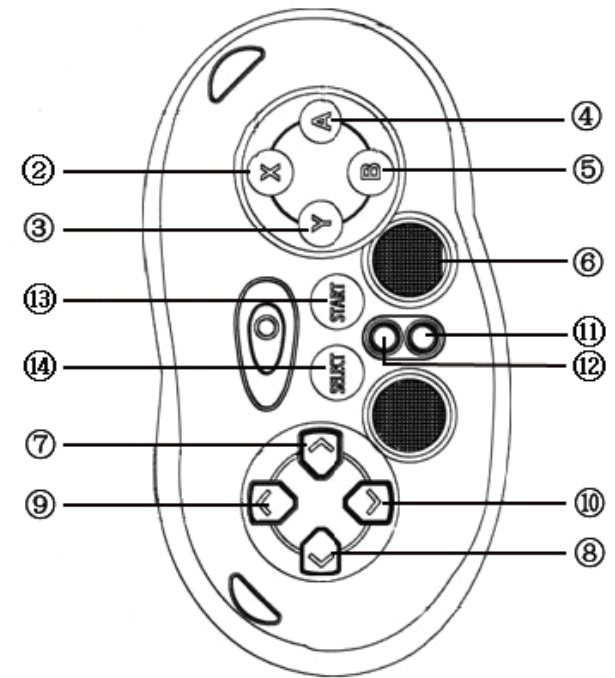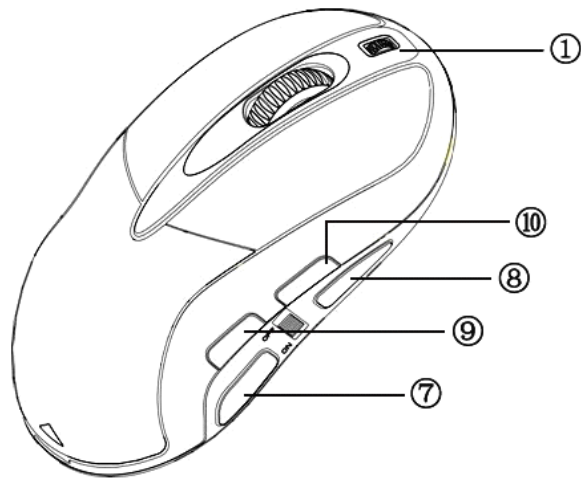

- ①: Gear-Lock, scroll backward to lock mouse left & right buttons under Joypad Mode or Remote Control Mode to avoid interference
- ②: Media Launch Button, to launch system default media player
- ③: Mute ④: Play/Pause ⑤: Stop
- ⑥: Move this 3D analog stick to control mouse cursor
- ⑦: Volume Up ⑧: Volume Down ⑨: Previous Track
- ⑩: Next Track ⑪: PC Sleep ⑫: PC Power Off
- ⑬: 3D Mouse Left Button ⑭: 3D Mouse Right Button

Under Remote Control Mode, you can control 3D mouse's cursor via moving analog stick ⑥; The START & SELECT buttons perform 3D mouse left & right buttons' duty.

Force Feedback Function


To enrich your gaming experience, only one step should be done is to install our purpose-did software which can be downloaded from our website or obtained from our distributors or retailers to make GameMouse a shock joypad.

Mouse Sleep & Wake-Up

- Under Mouse Mode, it will enter sleep status if it's unused within 30 seconds, it can be easily & senselessly woke up via moving or pressing any mouse buttons;
- Under Remote Control Mode, 3D mouse will enter sleep status if it's unused within 2 minutes, it can be woke up via pressing any buttons on the joypad except ⑪、⑫ buttons.

Other Precautions

- Battery Specification: AA battery (⚠ While battery charging, do make sure your battery is rechargeable. Manufacturer takes no responsibility for the results caused by wrong operation.);
- To successfully establish ID link, please keep mouse & receiver within 1 meter;
- If auto ID link fails, please switch off mouse power, press down SELECT & START buttons together and switch on mouse power at the same time to execute ID link manually;
- To reuse mouse after power is cut off, please directly switch on battery power and use, no need to replug receiver and re-establish ID link;
- Don't dismantle mouse and nano receiver if you're non-professional so as to avoid internal component damage;
Please use dry and soft cotton cloth to clean the mouse;
Please put the exhausted batteries into battery recycling bin, don't arbitrarily discard or throw them into the fire.



Correct Disposal of This Product (Waste Electrical & Electronic Equipment)

(Applicable in the European Union and other European countries with separate collection systems)

This marking, shown on the product or its literature, indicates that it should not be disposed with other household wastes at the end of its working life. To prevent possible harm to the environment or human health from uncontrolled waste disposal, please separate this from other types of wastes and recycle it responsibly to promote the sustainable reuse of material resources. Household users should contact either the retailer where they purchased this product, or their local government office, for details of where and how they can take this item for environmentally safe recycling. Business users should contact their supplier and check the terms and conditions of the purchase contract. This product should not be mixed with other commercial wastes for disposal.